

CARLYLE SCROLL COMPRESSOR SPECIFICATIONS



MODEL SRH752AC

400 VOLTS, THREE PHASE, 50HZ, R-22

NOMINAL PERFORMANCE AT ASRE/T 400 VOLTS

Capacity	63,400 Btu/hr
EER	11.5 Btu/W-hr
Power	5520 W
Current	8.4 A

RATING CONDITIONS AT ASRE/T

Condensing Temp.	130°F
Evaporating Temp.	45°F
Return Gas Temp.	95°F
Liquid Temp.	115°F
Ambient Temp.	95°F

MOTOR

Operating Voltage Range	360-440
Locked Rotor Amps	73.0
Maximum Continuous Current	14.8
Rated Load Amps	9.5

ELECTRICAL COMPONENTS

Motor Protector Type	Internal
Run Capacitor Rating - mF/Volts	N/A

OIL


Oil Type	Zerol 150 with 3% SYN-O-AD
Initial Charge	72 oz
Re-Charge	70 oz

COMPRESSOR


Maximum Discharge Temp.	280°F
Displacement	6.18 in ³ /rev
Weight (Wet)	95.0 lbs
UL/CSA File #	SA4936/LR88061

Specifications are subject to change without notice
Nominal Performance value +/- 5%
Ratings generated with air over compressor

SR MODEL OUTLINE DIMENSIONS

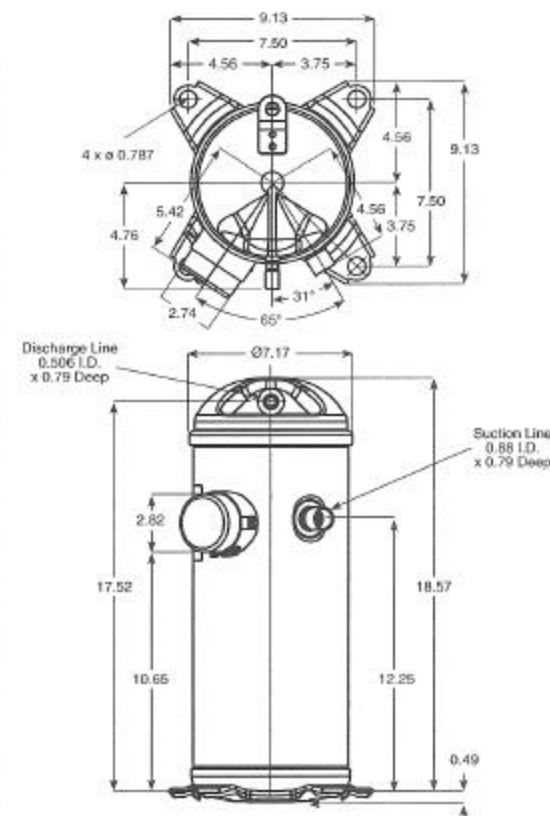

ISOLATOR MOUNTING DIAGRAM

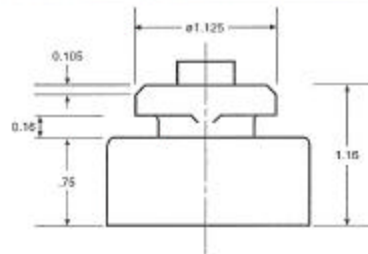

63,400 Btu/h

Carlyle Compressor Company
In the U.S.A. and Puerto Rico: 1-800-GO-CARLYLE (1-800-462-2759)
Canada: 1-800-258-1123
Mexico: 001-800-462-2759
Fax: 315-432-3274
© Carlyle Compressor Company 2000

