

_____ 殿

发行日期:

DATE: _____

东芝全封闭型压缩机承认规格书

TOSHIBA HERMETIC COMPRESSOR SPECIFICATION

机种名(Model): **PH160X1C-4DZDE3**

发行号(Issue NO.): GMCC—

承认印签 <i>S I G N A T U R E</i>
仅供参考
承认日期 <i>D A T E</i>

本规格书从贵公司承认之日起生效，一式叁份。贵公司负责人承认签名之后请返回我公司一份，贵公司保留两份。

*This document will be effective with your authorized signature.
Please return one (1) copy of this form, and keep the other
two (2) copies for your records.*

广东美芝制冷设备有限公司

广东省顺德市顺峰山工业开发区

GUANGDONG MEIZHI COMPRESSOR LIMITED

Shunfengshan Industrial Development Area
Shunde City, Guangdong Province, P.R. CHINA

承 认	担 当

1. 规格 SPECIFICATION

1-1、压缩机要项 PRINCIPAL ITEMS OF COMPRESSOR


空调机的型式 AIR CONDITIONER TYPE	冷暖兼用型空调机 COOLING & HEATING
压缩机的型式 COMPRESSOR TYPE	全封闭型电动压缩机 HERMETIC MOTOR COMPRESSOR
压缩机方式 COMPRESSION TYPE	旋转式 ROTARY
安全认证 Safety Approval	CCC
使用冷媒 REFRIGERANT	R22
润滑油名·油量 OIL·OIL CHARGE	SUNISO 4GSD 或同等品 ·400 ml
涂装 PAINTING	黑色 BLACK COLOR PAINT
总质量（含润滑油量） NET MASS (OIL INCLUDED)	12.0 kg
排除容积 DISPLACEMENT	16.1 cm ³ /rev
气缸直径高度 CYLINDER BORE×HEIGHT	φ43×30 mm
偏心量 ORBITAL RADIUS	4.40 mm
吸气管内径 SUCTION TUBE (I. D)	9.8 mm
排气管内径 DISCHARGE TUBE (I. D)	8.2 mm

1-2 电机 MOTOR

电机的型式·起动方式 MOTOR TYPE·STARTING TYPE	单相诱导电机·运转电容型 SINGLE PHASE INDUCTION MOTOR · PSC
极数 POLE	极 2 POLE
额定电压频率 RATED VOLTAGE·FREQUENCY	单相 1φ-50Hz-220/240V
额定回转数 RATED REVOLUTION	48.1±1% S-1
绝缘等级 INSULATION GRADE	类 E GRADE
绕组阻抗 WINDING RESISTANCE (20℃)	主绕组 辅绕组 Main: 3.33±5% Ω Aux.: 3.78±5% Ω
起动电流 STARTING CURRENT	(at 1φ-50Hz-220/240V) 19.8+10% A

1-3、电气部品规格. 配线接线图 ELECTRICAL COMPONENT & WIRING DIAGRAM

品名 PARTS NAME	规格 SPECIFICATION
运转电容 RUNNING CAPACITOR	(用户自己准备 Out of Supply) 电容容量 Capacity : 30 μ F 耐压 Withstanding Voltage: ≥ 370VAC
过载保护器 OVER LOAD PROTECTOR	外置 (EXTERNAL) MRA13430-9087 or B160-135-241E or BF785-MH

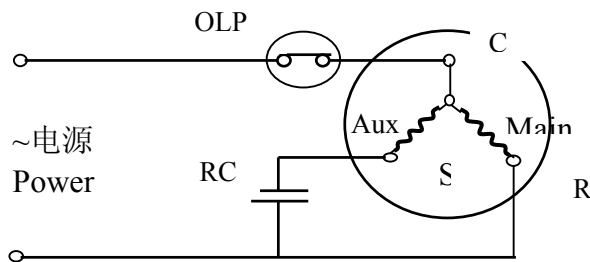

S: START (辅绕组 AUX WINDING)
R: RUN (主绕组 MAIN WINDING)
C: COMMON (共通)
RC: 运转电容 RUNNING CAPACITOR

2. 压缩机及标准附属品一览 COMPRESSOR & STANDARD ACCESSORY

品名 PARTS NAME	型号 TYPE (MODEL)	个数 PIECES	图纸代号 DRAWING CODE	制品代号 PARTS CODE
压缩机外形图 DRAW EXTER	PH160X1C-4DZDE3	1	1K14898710	1K51002646
橡胶垫 RUBBER CUSHION	$\phi 150$ 底脚用 FOR BASE OF $\phi 150$ -TYPE	3	1K14910111	
端子罩 TERMINAL COVER	外保护器定速机共用 FOR FIXED-FREQUENCY MODELS	1	1K14722311	
端子垫片 TERMINAL PACKING	外保护器定速机专用 FOR External OLP FIXED-FREQUENCY MODELS	1	1K14720913	
螺母垫片 NUT PACKING		1	1K14721010	
端子螺母 TERMINAL NUT		1	1K14300612	
过载保护器弹簧 OVEEBAD PROTECTOR SPRING	外保护器定速机专用 FOR External OLP FIXED FREQUENCY MODEL	1	1K14460410	
过载保护器 OVERLOAD PROTECTOR	MRA13430-9087 or B160-135-241E or BF785-MH	1	1K14920032 or 1K14920210 or 1K14920610	
接地螺钉 EARTHING BOLT	* 铜质镀镍螺钉 NI-PLATED COPPER BOLT	1	1K14300210	
接地螺钉垫片 WASHER FOR EARTHING BOLT	* 铜质镀镍垫片 NI-PLATED COPPER WASHER	1	1K14300310	

请用东芝指定之压缩机零部件和附属品。 USE COMPRESSOR PARTS AND ACCESSORIES SPECIFIED BY TOSHIBA

***! 请注意 !Attention:**

如使用压缩机底脚上的接地孔，务必将原压缩机上的防锈保护钢质螺钉与垫片卸下废弃，换上附件中的铜质螺钉与垫片或相当品。

If the Earthing Hole on the Base of Compressor will have been connected with Earthing Wire, Please Remove and throw away the Antirust Steel Bolt and Washer which has been installed on Compressor, and Use the Copper Bolt and Washer listed above or Equivalent.

3. 运转标准 STANDARD OF PERFORMANCE

3-1、性能 RATED PERFORMANCE

		(参考) GB 条件时 AT GB STANDARD	
冷冻能力 CAPACITY	W	☆ 2730/2750 ± 5%	
输入功率 MOTOR INPUT	W	☆ 875/915 ± 5%	
电流 CURRENT	A	☆ 4.06/3.95 ± 5%	
COP	W/W %	☆ 312/301 ± 5%	
噪音 SOUND LEVEL dB(A) (A RANGE) SOUND POWER LEVEL	dB(A)	★ 64 以下 MAX	
振动 VIBRATION (法线方向振动实效值)	m/s ²	★ 2.8 以下 MAX	

☆测定条件 RATING CONDITIONS

- 额定电压 RATED VOLTAGE : 1φ-50Hz-220/240V
- 冷凝温度 COND. TEMP. : 54.4℃
- 蒸发温度 EVAP. TEMP : 7.2℃
- 吸气温度 RETURN GAS TEMP : 35℃
- 过冷却液温 LIQUID TEMP. : 46.1℃
- 环境温度 AMBIENT TEMP. : 35℃
- 排气温度 DISCHARGE TUBE TEMP. : 85℃
- 强制空冷 FORCED AIR

※根据东芝量热标准

ACCORDING TO TOSHIBA'S CALORIEMETER STANDARD

★测定条件 RATING CONDITIONS

- 额定电压 RATED VOLTAGE : 1φ-50Hz-220/240V
- 冷凝温度 COND. TEMP. : 54.4℃
- 蒸发温度 EVAP. TEMP : 7.2℃
- 吸气温度 RETURN GAS TEMP : 18℃
- 排气温度 DISCHARGE TUBE TEMP. : 80.0℃
- 环境温度 AMBIENT TEMP. : 20.0℃

※排气温度由冷媒回液量控制

DISCHARGE TUBE TEMP IS CONTROLLED BY FLOOD BACK AMOUNT OF REFRIGERANT

运转停止电压 B.D.V	V	198 以下 MAX	Pd/Ps=2.60 / 0.69 MPa
起动电压 STARTING VOLTAGE	V	187 以下 MAX	Pd=Ps=0.98 ± 0.1 MPa Pd-Ps ≤ 0.05 MPa

3-2、一般特性 CHARACTERISTICS

气密试验压力 (AP) LEAK TIGHT PRESSURE	高压侧 HIGHER PRESSURE SIDE	2.9 MPa
	低压侧 LOWER PRESSURE SIDE	1.4 MPa
耐压试验压力 (TP) HYDROSTATIC STRENGTH PREESSURE	高压侧 HIGHER PRESSURE SIDE	4.2 MPa
	低压侧 LOWER PRESSURE SIDE	2.0 MPa

绝缘阻抗 (封入氮气时) INSULATION RESISTANCE (FILLED WITH NITROGEN GAS)	20 MΩ	以上 MIN
绝缘耐压 WITHSTAND VOLTAGE	AC1500V-1min	
残余水分量 RESIDUAL MOISTURE	• 含尘量 RESIDUAL IMPURITIES	150mg 以下 • 45mg 以下 MAX • MAX
接地阻抗 EARTHING RESISTANCE	0.1 Ω	以下 MAX

4、使用条件范围 OPERATING CONDITIONS

项目 ITEMS	负荷 LOAD	标 准 STANDARD	最 高 MAX.
排气压力 DISCHARGE PRESSURE	MPa(G)	2.06 以下 MAX	2.6 以下 MAX
吸气压力 SUCTION PRESSURE	MPa(G)	0.29~0.59	0.1~0.69
压缩比 COMPRESSION RATIO		8 以下 MAX	8 以下 MAX
绕组温度 MOTOR COIL TEMP.	℃	100 以下 MAX	125 以下 MAX
排气管温度 DISCHARGE TUBE TEMP.	℃	100 以下 MAX	115 以下 MAX

※ 空调系统设计制造注意事项 SYSTEM DESIGN AND PROCESS LIMITATIONS

许容冷媒封入量 LIMIT OF REFFIGERANT AMOUNT	kg 0.85 以下 MAX
连续液返回量 CONTINUOUS FLOOD BACK	连续液在储液罐前的返回量不超过总冷媒循环量的 10% CONTINUOUS FLUID BACK BEFORE THE ACCUMULATOR NOT BE MORE THAN 10% OF TOTAL CIRCULATION QUANTITY OF REFRIGERANT.
异常音、异常电流 ABNORMAL NOISE & CURRENT	起动时和冷冻循环切换时没有异常音及异常电流发生 KNOCKING NOISE OR OVERCURRENT SHOULD NOT OCCUR AT START-UP OR REVERSING CYCLE.
温差ΔT: TEMP.DIFFERENT℃ (ΔT=壳底部温度-冷凝温度) (ΔT=CASE BOTTOM TEMP -CONDENSING TEMP	连续运转时 (包含除霜、除湿) 温差在 5℃ 以上。控制运转时在 0℃ 以上。 5 OR MORE: CONTINUOUS OPERATION 5 OR MORE: DEFROSTING OPERATION 5 OR MORE: DRY OPERATION 0 OR MORE: CONTROLLED INTERMITTENT OPERATION
断续运转间隔、次数 INTERMITTENT OPERATION TIMES	每一循环 5 分钟以上 (ON2 分钟以上、OFF2 分钟以上)。20 万次冷冻循环以下。 200000 CYCLES OR LESS, 5 MINUTES OR MORE (ON: 2MINUTES OR MORE, OFF: 2MINUTES MORE)
运转电压波动允许范围 SUPPLY VOLTAGE RANGE	220V-10%~240V+10%(198~264V)以内 THE SUPPLY VOLTAGE SHOULD BE 220V-10%~240V+10%(198~264V)

运转频率允许范围 POWER FREQUENCY	额定频率的±2%以内 THE POWER FREQUENCY SHOULD BE THE RATED VALUE ±2%
起动时的压力差 PRESSURE DIFFERENCE AT START-UP	起动时高压侧和低压侧压力平衡 THE PRESSURE SHOULD BE BALANCED THE HIGH-PRESSURE AND LOW-PRESSURE SIDES AT START-UP
许容运转倾斜度 TILT IN OPERATION	压缩机在倾斜角 5°以内可以正常运转 COMPRESSOR SHOULD BE RUN AT A GRADIENT OF UP TO 5°

许容油面高度 LUBRICATION OIL LEVEL	压缩机润滑油面高度标准如下图，但是见到润滑油起泡时，起泡部份不计入在内。 THE LUBRICATION OIL LEVEL IN A COMPRESSOR SHOULD BE AS LISTED BELOW IF THE LUBRICATION OIL IS FOAMING FOAM SHOULD BE EXCLUDED FROM THE OIL LEVEL																
	<table><tr><th colspan="2">运转条件 OPERATING CONDITION</th><th>润滑油面 OIL LEVEL</th></tr><tr><td colspan="2">连续运转时 IN CONTINUOUS OPERATION</td><td>B水平线以上 B LEVEL OR HIGHER</td></tr><tr><td rowspan="2">起动时 WHEN STARTING</td><td>动转起动时 CONTROLLED START</td><td>B水平线以上 B LEVEL OR HIGHER</td></tr><tr><td>冷媒沉积时起动 AFTER SOAKING</td><td>B水平线以上。起动3分钟之后油面在A水平线以上。 B LEVEL OR HIGHER, A LEVEL OR HIGHER WITHIN 3MINUTES AFTER START-UP</td></tr><tr><td rowspan="2">除霜时IN DEF-ROSTING</td><td>热气除霜 DEFROSTING-HOT GAS</td><td>B水平线以上 B LEVEL OR HIGHER</td></tr><tr><td>逆向除霜 REVERSE CYCLE</td><td>B水平线以上 B LEVEL OR HIGHER</td></tr></table>		运转条件 OPERATING CONDITION		润滑油面 OIL LEVEL	连续运转时 IN CONTINUOUS OPERATION		B水平线以上 B LEVEL OR HIGHER	起动时 WHEN STARTING	动转起动时 CONTROLLED START	B水平线以上 B LEVEL OR HIGHER	冷媒沉积时起动 AFTER SOAKING	B水平线以上。起动3分钟之后油面在A水平线以上。 B LEVEL OR HIGHER, A LEVEL OR HIGHER WITHIN 3MINUTES AFTER START-UP	除霜时IN DEF-ROSTING	热气除霜 DEFROSTING-HOT GAS	B水平线以上 B LEVEL OR HIGHER	逆向除霜 REVERSE CYCLE
运转条件 OPERATING CONDITION		润滑油面 OIL LEVEL															
连续运转时 IN CONTINUOUS OPERATION		B水平线以上 B LEVEL OR HIGHER															
起动时 WHEN STARTING	动转起动时 CONTROLLED START	B水平线以上 B LEVEL OR HIGHER															
	冷媒沉积时起动 AFTER SOAKING	B水平线以上。起动3分钟之后油面在A水平线以上。 B LEVEL OR HIGHER, A LEVEL OR HIGHER WITHIN 3MINUTES AFTER START-UP															
除霜时IN DEF-ROSTING	热气除霜 DEFROSTING-HOT GAS	B水平线以上 B LEVEL OR HIGHER															
	逆向除霜 REVERSE CYCLE	B水平线以上 B LEVEL OR HIGHER															
	主轴承 MAIN BEARING 气缸 CYLINDER 副轴承 SUB BEARING 5 mm B LEVEL（水平线） A LEVEL（水平线） 副轴承座缘 UNDER THE EDGE OF FLANGE																
许容配管应力 TUBE STRES	压缩机配管不要产生共振。对于配管施加之应力请控制在下表允许应力值之内，配管设计时考虑防止应力折损。 TUBE TO BE CONNECTED WITH A COMPRESSOR SHOULD BE FREE OF RESONANCE. THE TUBE STRESS SHOULD NOT EXCEED THE VALUES LISTED BELOW TUBE SHOULD NOT BREAK DURING OPERATION, AT START-UP, AND AT STOP																

振动模式 VIBRATION MODE	许容应力值（半振幅） ALLOWABLE TUBING STRESS (HALF AMPLITUDE)
运转时 OPERATING	20N/mm ² 以下 OR LESS
起动时、停止时 START-UP STOP	30N/mm ² 以下 OR LESS
运输时、装卸时 IN TRANSIT	30N/mm ² 以下 OR LESS

压缩机禁止横放、倒置 DO NOT PUT A COMPRESSOR ON ITS SIDE OR TURN OVER.

压缩机承受的冲击负荷在 590m/s²以下，此外，压缩机的附属品应免受冲击。（如端子盖等）
AN IMPACT TO COMPRESSOR SHOULD BE LIMITED TO 590m/s² OR LESS ,NOT GIVE A SHOCK TO ACCESSORIES.

密封橡胶垫拔除后，请防止潮湿空气进入压缩机内部，请不要长时间放置。
DO NOT LEAVE THE PLUGS OF THE COMPRESSOR IN THE ATMOSPHERE FOR MANY HOURS AFTER OPEN FOR PREVENTING WATER FROM GETTING INSIDE.

空气运转时油质会加速劣化，绝对禁止。
AVOID OPERATION WITH AIR FOR PREVENTING THE LUBRICATION OIL'S DETERIORATION FROM ACCELERATING.

封入冷媒时请从冷凝器出口封入。
REFRIGERANT MUST ALWAYS BE FILLED FROM THE HIGHER SIDE OF THE REFRIGERATION CYCLE

绝对禁止压缩机逆向运转，逆运转过的压缩机不能再使用。
DO NOT REVERS COMPRESSOR OPERATION. DO NOT REUSE THE COMPRESSOR THAT ROTATED IN REVERS.

压缩机请不要放置在露天，请在-10~+65℃室内保管。
DO NOT ALLOW COMPRESSOR TO BE WEATHERED; STORE COMPRESSORS INDOOR AT -10~+65℃

连接压缩机引出线的长度要充分考虑压缩机振动，应留有余量。
LEAD WIRE CONNECTED TO A COMPRESSOR SHOULD HAVE A SUFFICIENT ALLOWANCE AGAINST VIBRATIONS OF A COMPRESSOR.

压缩机壳体表面温度可能会达 150℃高温，不容许配线或类似物接触压缩机表面。
SINCE THE COMPRESSOR TEMPERTURE MAY RISE AS HIGH AS 150℃, DO NOT ALLOW ELECTRIC CABLES OR THE LIKE TO DIRECTLY TOUCH COMPRESSORS.

压缩机的终端盖内禁止水滴，灰尘进入，必须做适当的防湿、防尘处理。
TAKE PRORER MOISTURE-PROOF OR DUST-PROOF MEASURES FOR THE COMPRESSOR TERMINAL BOX IF WATER DROPLETS, DUST, OR THE LIKE MAY OTHERWISE ENTER.

请注意压缩机外壳应避免与吸湿性的材料接触，以防止腐蚀。另外，不要暴露在腐蚀气体或有机物之中。
TURN ATTENTION TO GATHERING RUST ON IT'S SHELL WHEN ALLOWED COMPRESSOR TO COME IN TOUCH WITH HYGROSCOPIC MATERIALS. NOT BE EXPOSED TO CORROSIVE GASES OR ORGANIC SUBSTANCES.

使用在分体机的场合，最长配管不超过 15m，配管的高低落差最大 5m。除本规定情况外，有关使用条件范围也应满足。
FOR SPLIT TYPE AIR-CONDITIONERS, THE MAXIMUM PIPING LENGTH SHOULD BE 15m,

AN ELEVATION DIFFERENCE SHOULD BE WITHIN 5m, ALSO THE REQUIREMENTS HEREIN SHOULD BE MET。
许容冷媒量超出使用状况，须另行协商决定压缩机规格（储液器容量、油量等）以及空调系统的规格（储液器、曲轴箱加热器、油分离器、控制装置等）。 IF GAS CHARGE AMOUNT OF REFRIGERANT SPECIFIED IS EXCEEDED, BOTH PARTIES SHOULD DISCUSS THE MATTER TO DETERMINE COMPRESSOR SPECIFICATION (ACCUMULATOR VOLUME, LUBRICATING OIL AMOUNT) AND SYSTEM SPECIFICATIONS (CRANK CASE HEATER, OIL SEPERATOR, ADDITONAL ACCUMULATOR, ETC.)。
没得到 TOSHIBA 的授权请不要随意更改压缩机规格。R22 之外的冷媒禁止使用，否则有发生爆炸的可能。（特别是绝对禁止空气压缩） DO NOT MODIFY A COMPRESSOR WITHOUT TOSHIBA'S AUTHORIZATION. DO NOT FILL THE REFRIGERATION CYCLES WITH GAS EXCEPT R22, AS A COMPRESSOR MAY GO-UP IN A BLAST. (ESPECIALY COMPRESSING AIR IS NOT PERMITTED)
不准手拎排气管进行搬运、装卸。 DO NOT PROVIDE ANY FORCE ON DISCHARGE TUBE WHEN COMPRESSOR IS MOVED AND OR TRANSFERRED

5、 其它 THE OTHERS

5-1、充填N₂气体SEALING WITH NITROGEN GAS。

旋转式压缩机为防止生锈，填充有氮气。橡胶栓塞拔下时确认氮气吐气声。

THE ROTARY COMPRESSOR ARE SEALED WITH NITROGEN GAS FOR RUST PREVENTION WHEN REMOVING THE RUBBER CAP, IT SHALL BE MADE SURE AUDIBLY THAT THE NITROGEN GAS REMAINS。

5-2、包装 CONTAINER

压缩机包装式样依据本公司之标准。

A STANDARD CONTAINER SPECIFIED IN TOSHIBA IS USED。

5-3、规格书有效期限

本规格书经贵公司承认之日后即生效。如更改须再发行承认生效，以前之规格书便自动失效。


THIS DOCUMENT WILL EFFECTIVE AFTER TOSHIBA'S RECEIPT WITH YOUR AUTHORIZED SIGNATURE WHEN DESIGN MODIFICATION IS APPROVED BY THE CUSTOMER , THE CURRENT DOCUMENT IS UNAVAILABLE.

压缩机使用压力范围

LIMITATION OF OPERATION PRESSURE


单位:MPa(表压)

Unit :MPa(G)


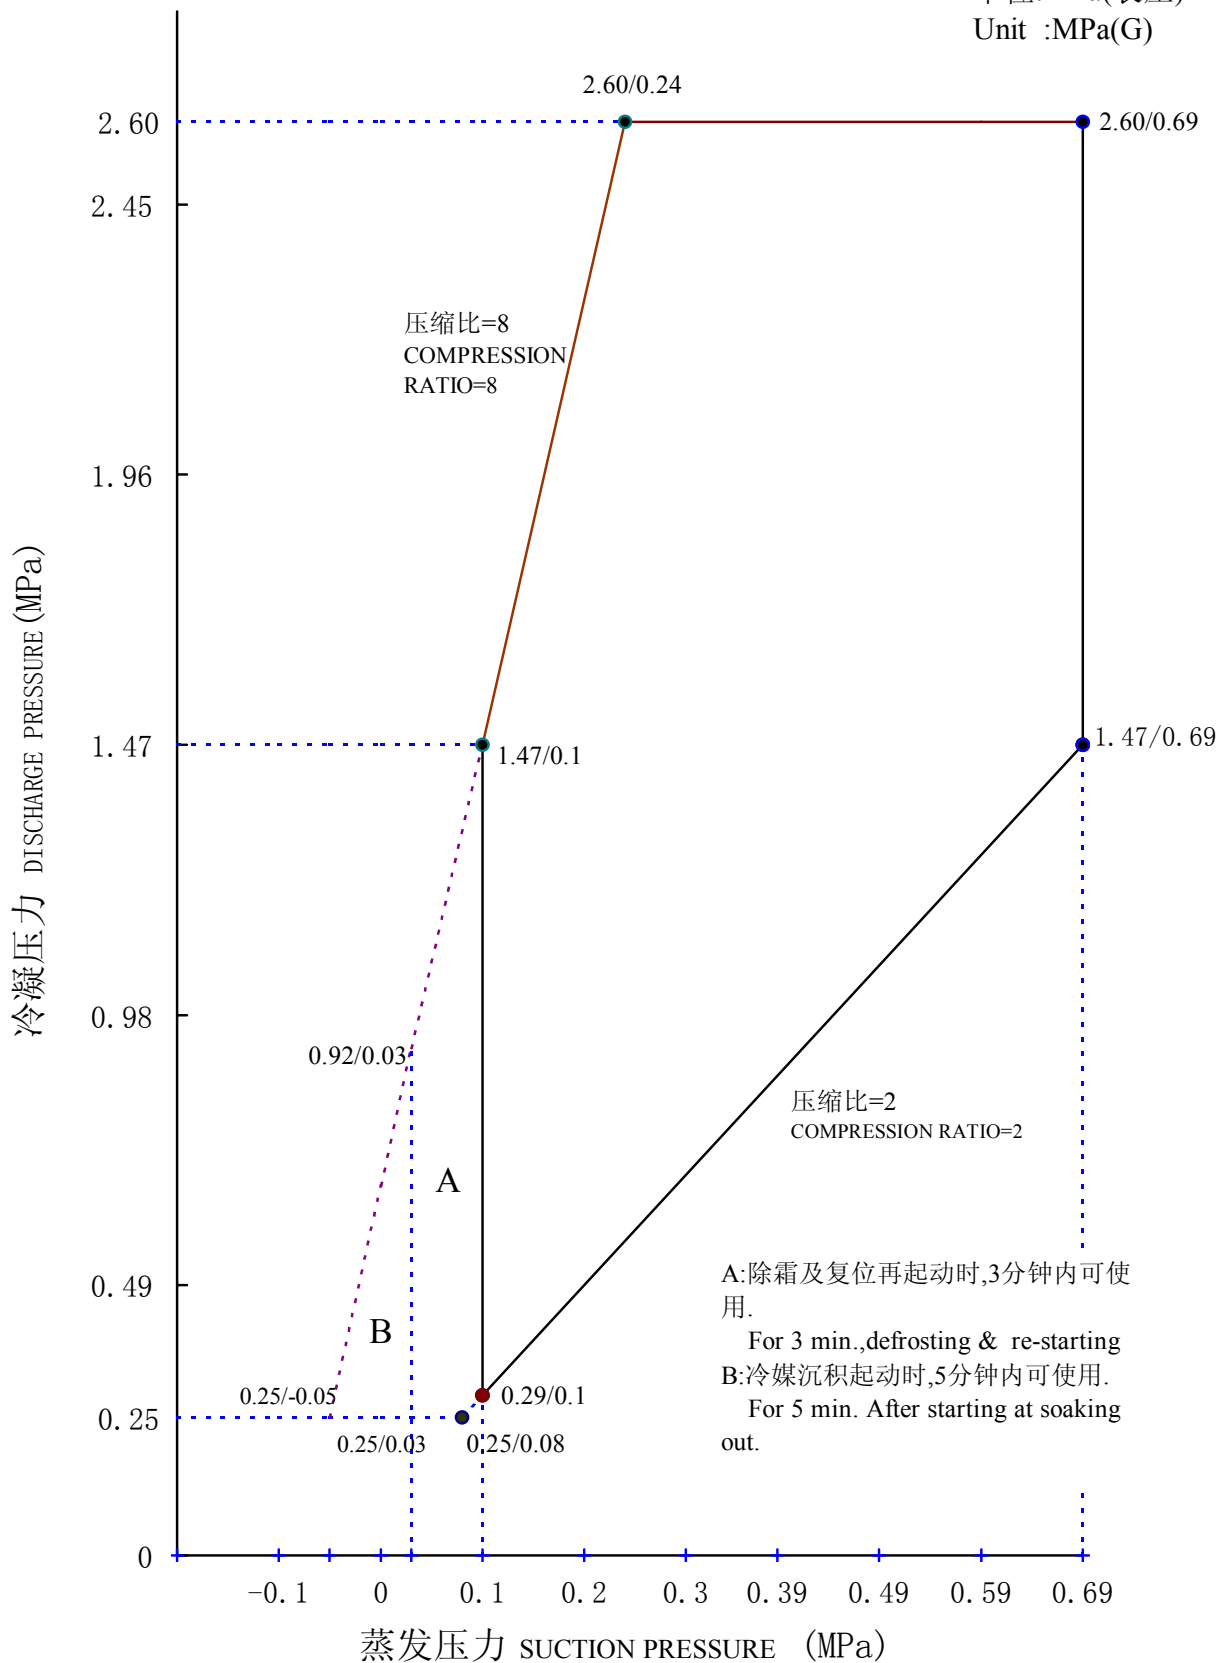


ELE COMPONENTS

Drawing No. 1K14722017

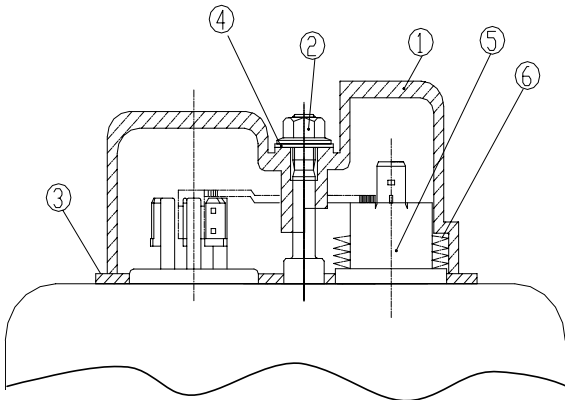

⑥	OL SPRING	1K14460410
⑤	OVERLOAD PROTECTOR	1K14920*Gr
④	NUT PACKING	1K14721010
③	TERMINAL PACKING	1K14720913
②	TERMINAL NUT	1K14300612
①	TERMINAL COVER	1K14722311
PART NO	TITLE	DRAWN NO

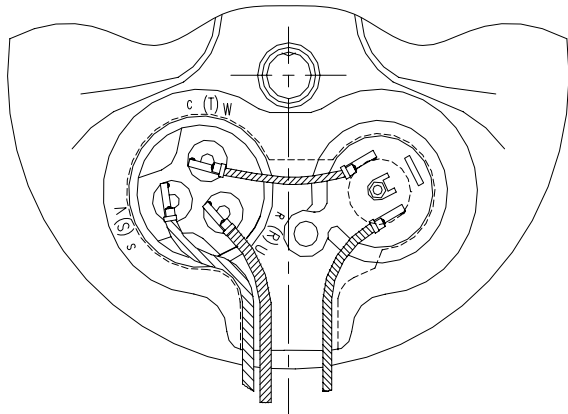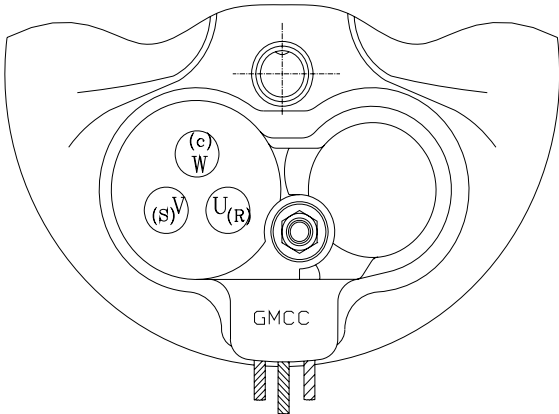



NOTES

Tightening torque of terminal nut: $1.2 \pm 0.2 \text{ Nm}$



广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

TERMI COVER

Drawing No. 1K14722311

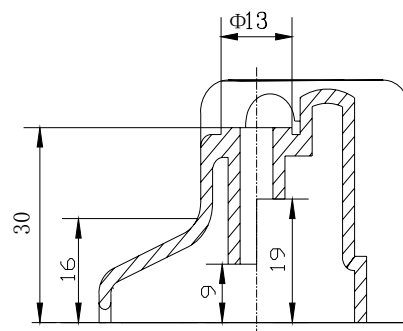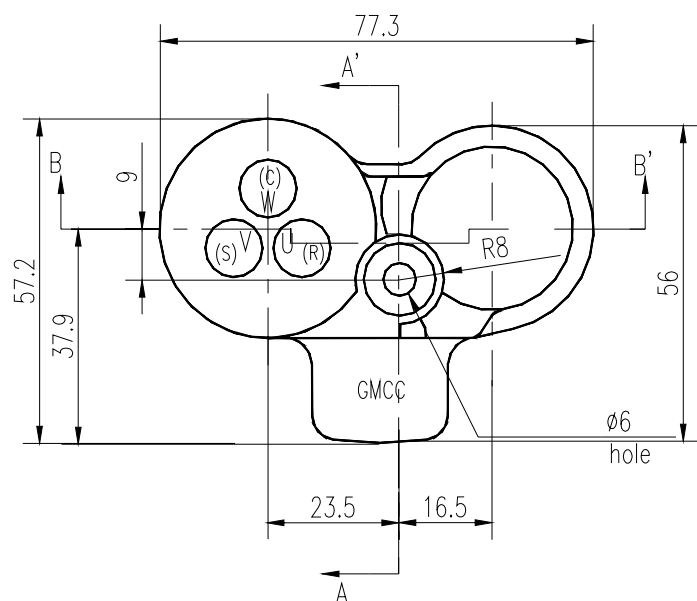

Section A-A'

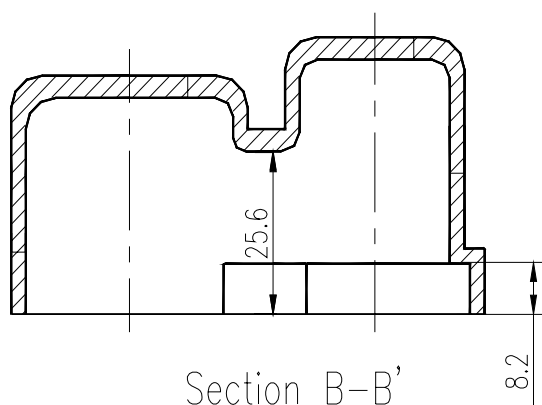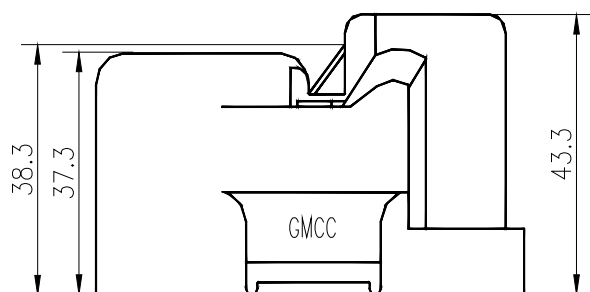

NOTES

MATERIAL:POLYCARBONATE

COLOR:BLACK


广东美芝制冷设备有限公司

GUANGDONG MEIZHI COMPRESSOR LTD

External Overload Protector

外置保护器

1K14920*Gr

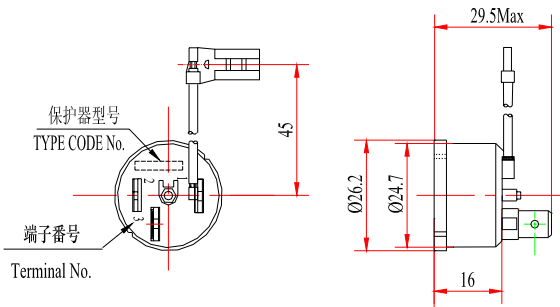

制造厂：佛山通宝股份有限公司

Manufacturer: Foshan TongBao Co., Limited

型名Model: B × × × - × × × - × × × ×



制造厂：苏州江南航天机电工业公司

Manufacturer: Suzhou JiangNan Co., Limited

型名Model: B F × × × - × ×

☆注：根据型号不同，端子插片位置可在2或3处。


☆Note: Terminal may be at the position of "2" or "3" because of different Model.

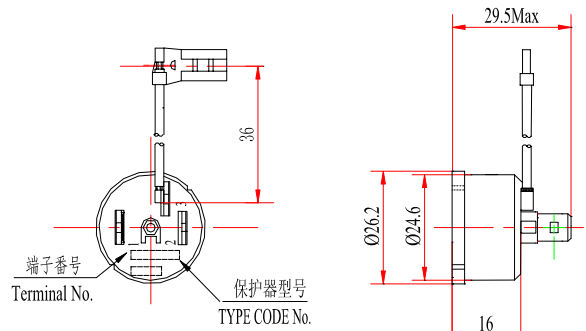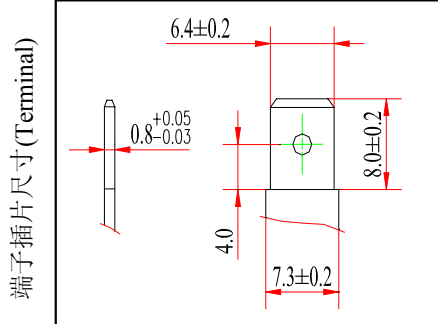

制造厂：德州仪器（中国）有限公司

Manufacturer: Texas Instrument (China) Co., Limited

型名Model: MRA × × × × × - 9087

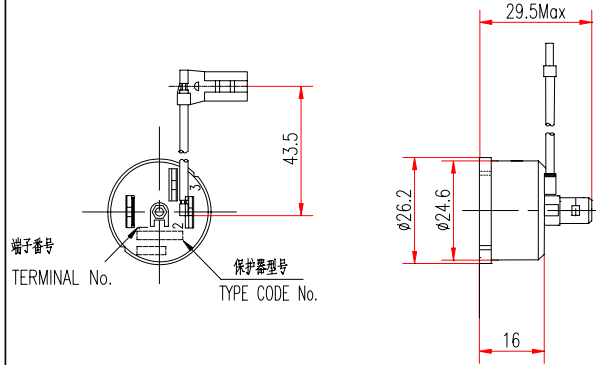

制造厂：德州仪器（中国）有限公司

Manufacturer: Texas Instrument (China) Co., Limited


型名Model: MRA × × × × × - 9084

1K14920	610	BF785-MH	135±5	69±11	
	180	B190-135-141E	135±5	69±11	
	170	B265-135-141E	135±5	69±11	
	160	B480-135-141E	135±5	69±11	
	150	B440-135-141E	135±5	69±11	
	140	B350-135-141E	135±5	69±11	
	130	B300-130-141E	130±5	69±11	
	120	B185-135-141C	135±5	69±11	
	110	B160-135-141E	135±5	69±11	
	270	B140-135-241E	135±5	69±11	
	260	B190-135-241E	135±5	69±11	
	250	B150-135A-241E	135±5	69±11	
	240	B150-135-241E	135±5	69±11	
	230	B190-130-241E	130±5	69±11	
	220	B135-135-241E	135±5	69±11	
	210	B160-135-241E	135±5	69±11	
	720	MRA99948-9084	135±5	69±11	
	710	MRA99947-9087	135±5	69±11	
	050	MRA99950-9087	135±5	69±11	
	040	MRA99949-9087	135±5	69±11	
	032	MRA13430-9087	135±5	69±11	
	022	MRA13408-9087	135±5	69±11	
	012	MRA13407-9087	135±5	69±11	
图号 Drawing No.	型号 Model	动作温度 Trip Temp.(℃)	复位温度 Reset Temp.(℃)	备注 Remarks	

广东美芝制冷设备有限公司
Guangdong Meizhi Compressor Limited

TERMINAL PACKING

Drawing No. 1K14720913

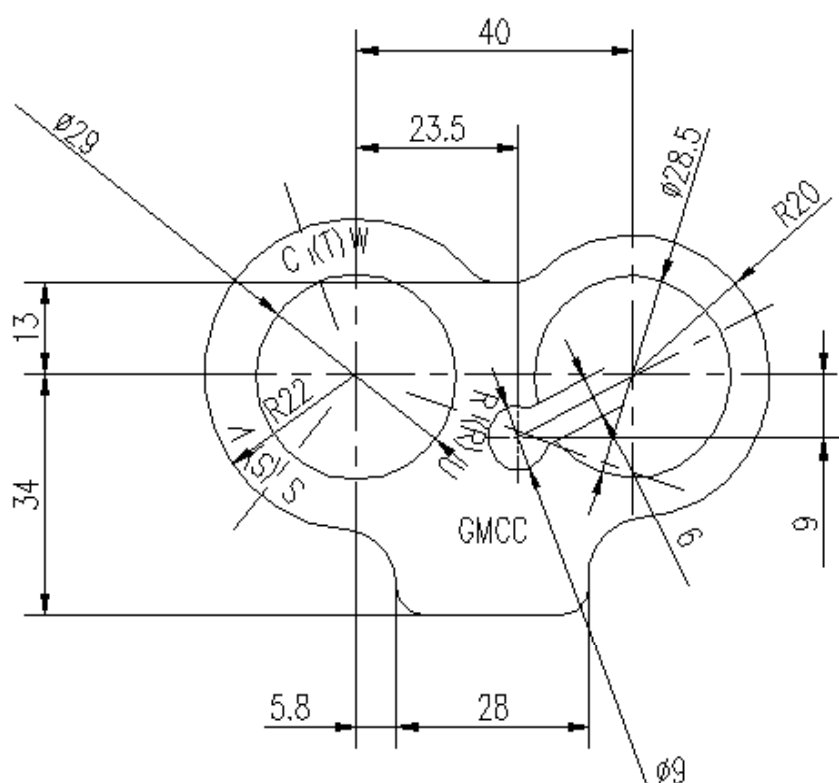

NOTES

MATERIAL:SI


THICKNESS: 1mm

COLOR:BLACK

广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

OL SPRING

Drawing No. 1K14460410

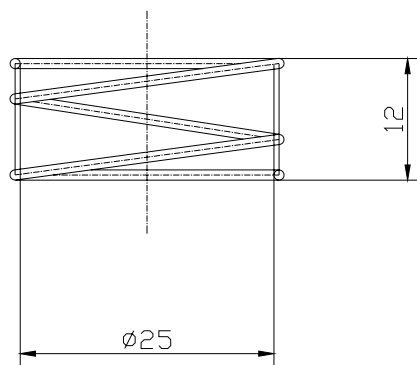

①Wire diameter	Φ 1.2
②Total number of winding	2.88T
③Inner diameter	Φ 25
④Effective winding number	0.88T
⑤Winding direction	right
⑥Spring specification	Load in used length 6mm: 4.5±1N

NOTES


MATERIAL:SUS304

广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

NUT PACKING

Drawing No. 1K14721010

THICKNESS : 1mm

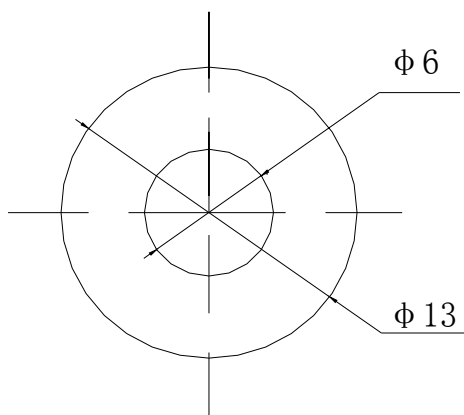


NOTES
MATERIAL:SI
COLOR:BLACK

广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

TERMINAL NUT

Drawing No. 1K14300612

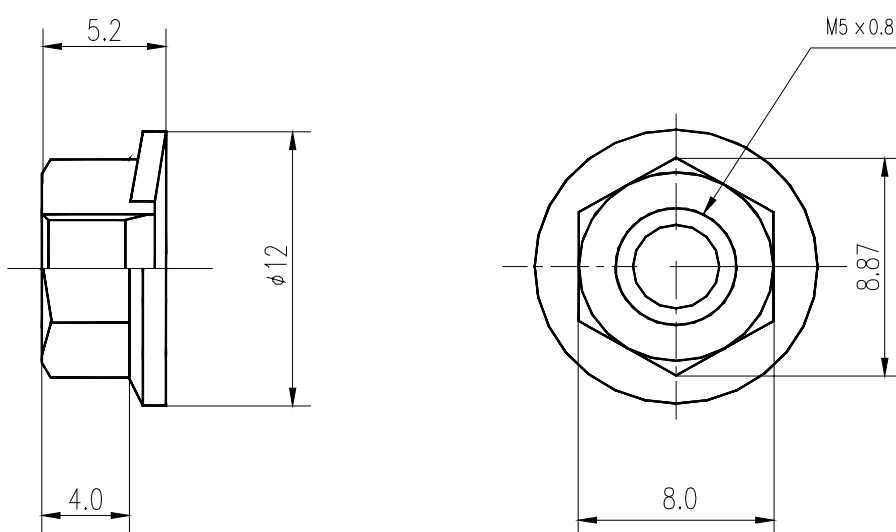

NOTES


MATERIAL: SWCH10

TREATMENT: WITHOUT HEXAVALENT CHROMIUM COMPOUNDS

广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

RUBBER CUSHION


Drawing No. 1K14910111

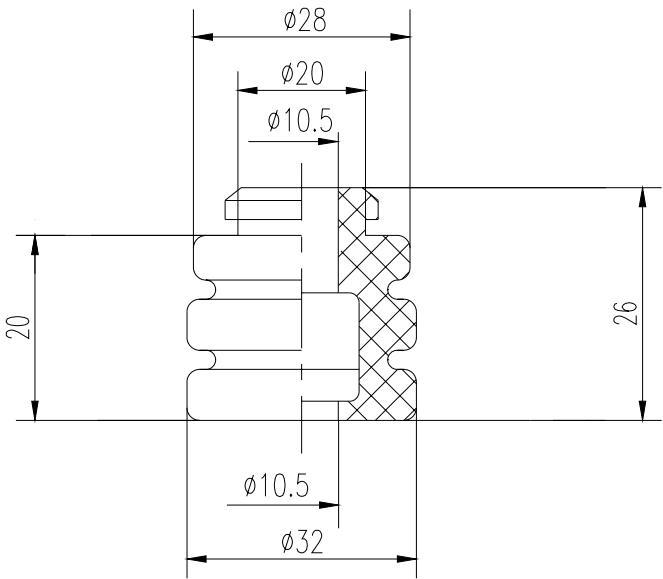

NOTES

MATERIAL : EPDM


HARDNESS : HS=38

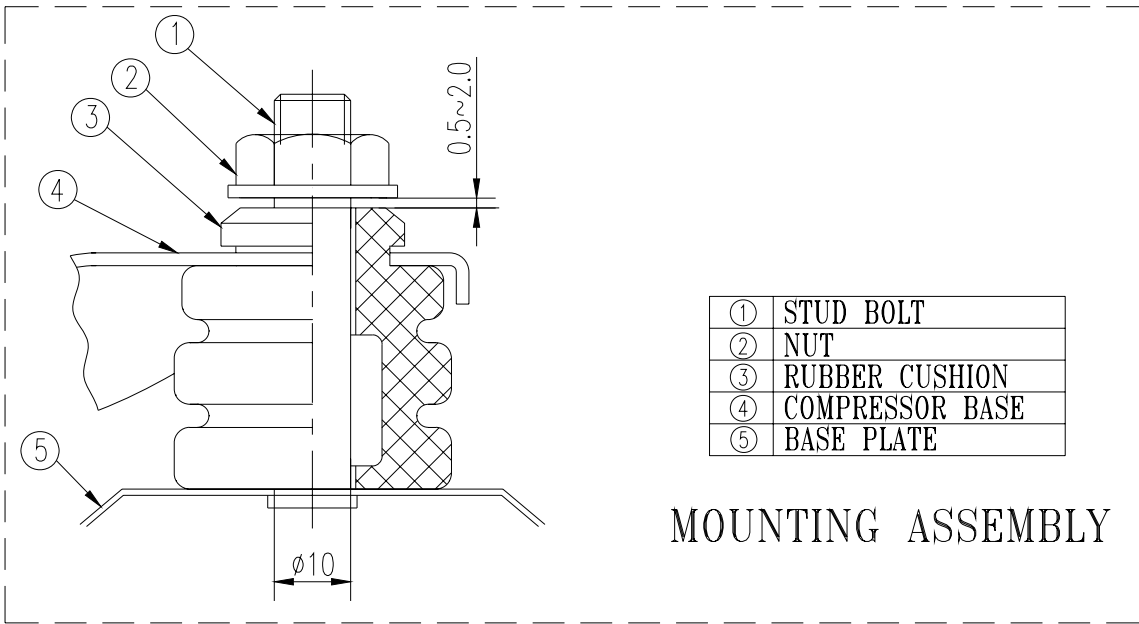

MOUNTING ASSEMBLY

HEX BOLT

Drawing No.1K14300210

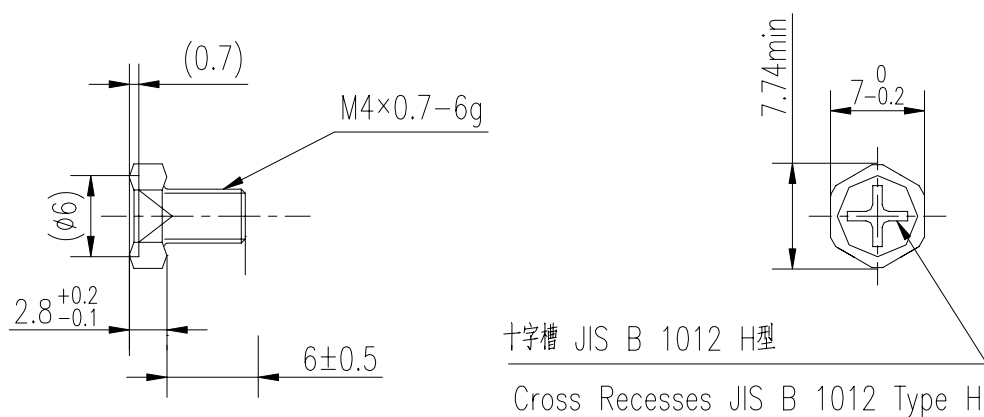

NOTES



MATERIAL:C2700W-1/4H

TREATMENT:ELECTROPLATED COATINGS OF NICKEL(Ep-Cu/Ni 3 b)

广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

WASHER

Drawing No.1K14300310



NOTES



MATERIAL:C2700W-1/4H

TREATMENT:ELECTROPLATED COATINGS OF NICKEL(Ep-Cu/Ni 3 b)


广东美芝制冷设备有限公司
GUANGDONG MEIZHI COMPRESSOR LTD

TOSHIBA


1K14898710
DRAWING NO.

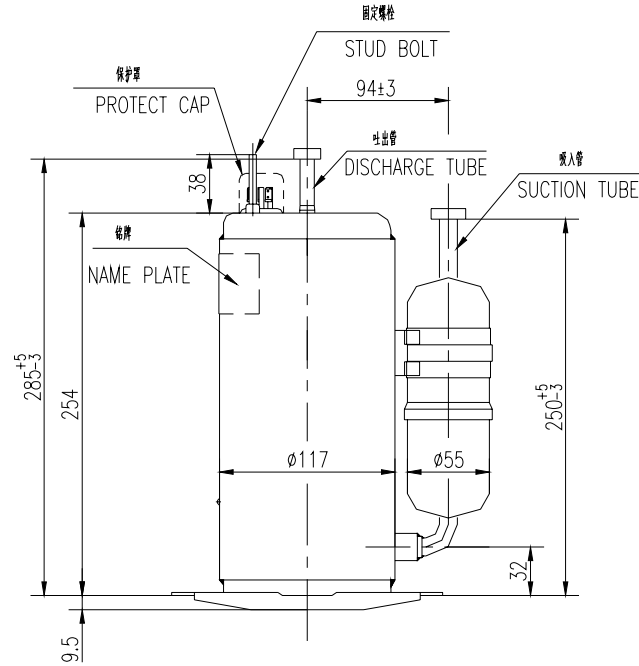

吐出管详细
DISCHARGE TUBE



吸入管详细
SUCTION TUBE

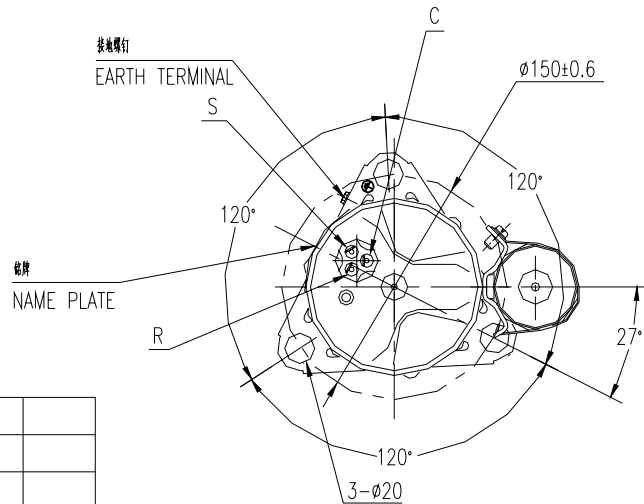

PH135X1C-4DZDE3	04.04.20
PH150X1C-4DZDE3	04.04.20
PH155X1C-4DZDE3	04.04.20
PH160X1C-4DZDE3	04.04.20
PH165X1C-4DZDE3	04.04.20
PH170X1C-4DZDE3	04.04.20
PH180X1C-4DZDE3	04.04.20
机 种 名	年 月 日

标 记	处 数	更改文件号	零 字	日 期
MARK	NUM.	REV. NO.	MODIFIED BY	DATE

设 计 DESIGNED BY	工 艺 TECHNOLOGY	简称 ABBR. DRAW EXTER	图号 DRAWING NO. 1K14898710
制 图 DRAWN BY	标 准 化 STANDARD	材料 MATERIAL	名称 TITLE 外形图
校 对 CHECKED BY	审 定 APPROVED BY	图样标记 STAGE OF DRAWING 1 9 9	数量 WEIGHT 比例 SCALE
审 核 AGREED BY	日 期 DATE	共 页 TOTAL PAGE 第 页 PAGE NO.	广东美芝制冷设备有限公司 20 - GUANGDONG MEIZHI COMPRESSOR LTD