



The E-type: the SWEP's boilermaker

The versatile and very compact E6T offers improved heat transfer for the majority of wall-hung, non-condensing boiler applications. The unique construction, with integrated start and endplates, allows the cover plates to be used for heat transfer to increase cost-effectiveness.

Easy to choose the right product solution

With SWEP's unique SSP CBE, the SWEP Software Package, you can do advanced heat transfer calculations yourself, and choose the product solution that suits your application best. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, or you would like to discuss different product solutions, SWEP offers all the service and support your need.


THIRD-PARTY APPROVALS (selection)

Europe, Pressure Equipment Directive (PED 97/23/EC)

For additional information please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.


E6T

COMPACT BRAZED HEAT EXCHANGER

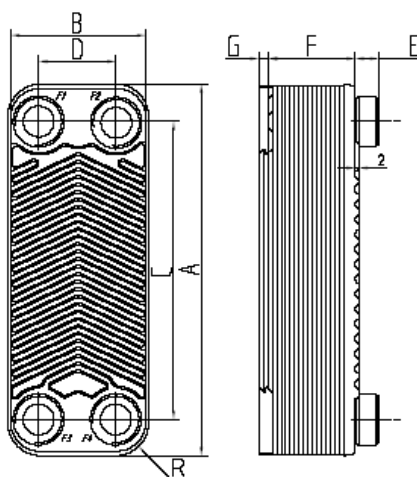

Measurements(mm)	Tolerance
A	210 +2 /-2
B	73 +1 /-1
C	172 +1 /-1
D	40 +1 /-1
E	12.1 (opt. 20.1) +1 /-1
F	2+2.24x(NP-2) +0.5% /-1.5%
G	7 +1 /-1
R	16

Port size F/P: 16mm



CBE port denomination

STANDARD CONNECTIONS

For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.



Internally Threaded Connections (Female) of Standard Type



Externally Threaded Connections (Male)

TECHNICAL DATA

Max working pressure at 100°C

Test pressure:
Min temperature:
Max temperature:
Max number of plates (NoP)
CBE weight

Hold-up volume: inner circuit

Plate material:
Brazing material:
Standard connection material

Inner circuit: 10 bar (145psi)
Outer circuit: 10 bar (145psi)
20 bar (290psi)
0°C (32F)
100°C (212F)
40
0.37+NoPx0.046kg
(0.8+NoPx0.1lbs)
(NoP/2-1)x0.026 litres
((NoP/2-1)x0.001 gal.)
EN 10028/7-1.4401 (AISI 316)
Pure Copper
EN 10272-1.4401 (AISI 316)



SWEP INTERNATIONAL AB

Box 105, SE-261 22 Landskrona, Sweden
Phone +46 418 40 04 00
Fax +46 418 292 95
Internet: www.swep.net
E-mail: info@swep.net